

PUC BORGHETTO SS, INDAG 46 CASAZZA

Instrument: TRZ-0089/01-10
Start recording: 29/02/12 12:59:41 End recording: 29/02/12 13:13:42
Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available
Trace length: 0h14'00". Analyzed 90% trace (manual window selection)
Sampling rate: 128 Hz
Window size: 20 s
Smoothing type: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

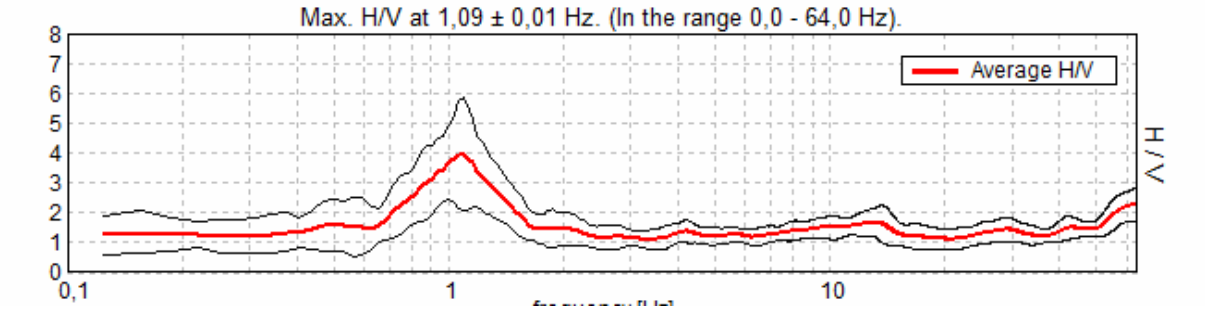

H/V TIME HISTORY

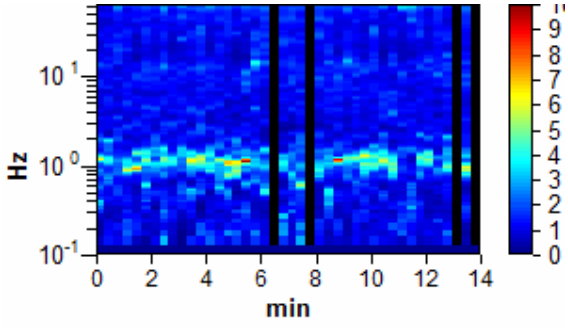

SINGLE COMPONENT SPECTRA

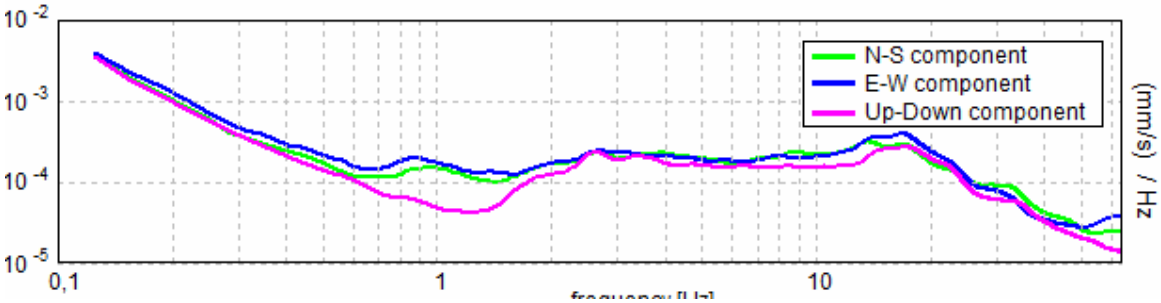

Indago S.r.l.
Sede legale: Via Sestri 15-4, 16154 Genova Sestri (GE)
Sede operativa: Corso Italia 26, 18012 Bordighera (IM)
P.Iva: 01945550992 – Reg. Impr e C.F.: GE0194550992 – R.E.A. n. 447184
☎ 0184-998536 🖷0184-998536
✉: indagosrl@libero.it - indago@pec.it
Skype: indagosrl

[According to the SESAME, 2005 guidelines. **Please read carefully the *Grilla* manual before interpreting the following tables**.]

Max. H/V at 1,09 ± 0,01 Hz (in the range 0,0 - 64,0 Hz).

Criteria for a reliable H/V curve [All 3 should be fulfilled]			
$f_0 > 10 / L_w$	1.09 > 0.50	OK	
$n_c(f_0) > 200$	831.3 > 200	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5$Hz $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5$Hz	Exceeded 0 out of 54 times	OK	
Criteria for a clear H/V peak [At least 5 out of 6 should be fulfilled]			
Exists f^- in $[f_0/4, f_0]$ | $A_{H/V}(f^-) < A_0 / 2$	0.688 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ | $A_{H/V}(f^+) < A_0 / 2$	1.531 Hz	OK	
$A_0 > 2$	3.95 > 2	OK	
$f_{peak}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	|0.00629| < 0.05	OK	
$\sigma_f < \varepsilon(f_0)$	0.00688 < 0.10938	OK	
$\sigma_A(f_0) < \theta(f_0)$	0.9189 < 1.78	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{logH/V}(f)$	standard deviation of log $A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$					
Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	0.25 f_0	0.2 f_0	0.15 f_0	0.10 f_0	0.05 f_0
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
log $\theta(f_0)$ for $\sigma_{logH/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Indago S.r.l.
Sede legale: Via Sestri 15-4, 16154 Genova Sestri (GE)
Sede operativa: Corso Italia 26, 18012 Bordighera (IM)
P.Iva: 01945550992 – Reg. Impr e C.F.: GE0194550992 – R.E.A. n. 447184
☎ 0184-998536 🖷0184-998536
✉: indagosrl@libero.it - indago@pec.it
Skype: indagosrl

Indago S.r.l.
Sede legale: Via Sestri 15-4, 16154 Genova Sestri (GE)
Sede operativa: Corso Italia 26, 18012 Bordighera (IM)
P.Iva: 01945550992 – Reg. Impr e C.F.: GE0194550992 – R.E.A. n. 447184
☎ 0184-998536 🖷0184-998536
✉: indagosrl@libero.it - indago@pec.it
Skype: indagosrl